


## EcoFasten GreenFasten GF1 Flashing Mount

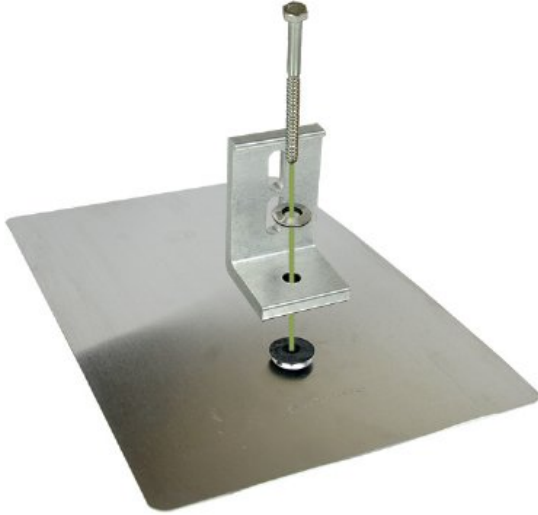

Price: CAD \$6.49

**SKU:** EFGF1

**Product Categories:** [Discontinued](#), [More](#)

**Product Tags:** [attachment](#), [canada](#), [ecofasten](#), [ecofasten solar](#), [flashing](#), [gf-1](#), [gf1](#), [gf1 canada](#), [roof attachment](#), [roof mount](#), [solar mount](#), [waterproof](#)

**Product Page:**

<https://www.modernoutpost.com/product/ecofasten-greenfasten-gf1-flashing-mount/>

### Product Variants

- EcoFasten GreenFasten GF1 Flashing Mount - Mill Finish ( )
- EcoFasten GreenFasten GF1 Flashing Mount - Matte Black ( )

## Product Summary

The EcoFasten GreenFasten GF1 Flashing Mount is a simple, inexpensive way to provide a waterproof attachment point for your solar racking. Available in mill or matte black finish.

## Product Description

The EcoFasten GreenFasten GF1 Flashing Mount is a simple, inexpensive way to provide a waterproof attachment point for your solar racking. The EcoFasten GreenFasten™ - GF1 system utilizes the [patented watertight technology](#) EcoFasten Solar is known for. The flashing is fit with our EPDM rubber bushing and when used with any EcoFasten Solar compression bracket (milled with countersink), a watertight seal is created, which maintains the integrity of the roof.

**NOTE:** Without the EcoFasten Solar compression bracket (L-Foot), there will not be a proper seal. L-Foot bracket & attachment bolt are not included.

GreenFasten GF1 utilizes a single fastener, providing a very fast install. (lag bolt or self-drilling hanger bolt NOT INCLUDED)

Backed by IAPMO certification, GreenFasten GF1 delivers a mounting solution for all new or existing (retrofit) composition shingle roofs.

### Ecofasten GF1 Features...

- IAPMO Certified - Patented watertight seal forms an impenetrable moisture barrier - Compatible with a variety of compression bracket options - Extensively tested for pullout and shear - Customized solutions to match any proprietary hardware - Meets or exceeds all known building codes - Accepted by major roofing materials manufacturers without voiding warranties - Retrofit without removing shingles - Utilizes lag bolt or self-drilling fastener to secure to the roof - Watch the [installation video](#)] - EcoFasten Solar products are protected by [these U.S. Patents](#)]

### Applicable Roof Types...

- Composition Shingle

## Required Parts...

The GreenFasten™ System requires 3 components to achieve watertight protection.

- GreenFasten™ GF1 flashing (8"x12", 0.032" Aluminum flashing) includes one 5/16" ID bonded washer - Compression bracket - includes one 3/8"-16 x 1-1/4" bolt and one 3/8" flange nut for racking - Single fastener - 5/16" diameter

## Specifications...

[Download the Spec Sheet\]](#)

## Product Attributes

- Dimensions: N/A
- Colour: Mill Finish, Matte Black

## Product Gallery

