


PV AC Disconnect Rating Label

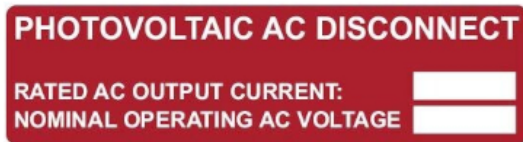

Price: CAD \$3.99

SKU: HTLABEL-59600892-AC-DISCO

Product Categories: [Accessories](#), [Other Bits](#), [Shop](#)

Product Page: <https://www.modernoutpost.com/product/pv-ac-disconnect-rating-label/>

Product Summary

This AC disconnect label is made of UV-stable materials and adhesives that bind to both baked enamel and powder coat surfaces. For the protection of first responders, labels are made with reflective materials where necessary. When variable voltage or series data must be printed and displayed, certain pre-printed labels may be printed with a thermal transfer printer.

Product Description

This AC disconnect label is made of UV-stable materials and adhesives that bind to both baked enamel and powder coat surfaces. For the protection of first responders, labels are made with reflective materials where necessary. When variable voltage or series data must be printed and displayed, certain pre-printed labels may be printed with a thermal transfer printer.




The National Electrical Code (CEC & NEC) and the International Fire Code (IFC) are planned to meet the specifications of the HellermannTyton Pre-Printed Solar Installation Labels, as well as being applicable to the Authority Having Jurisdiction (AHJ).

Label Features

- UV-resistant inks and fabrics are used to ensure durability and weather resistance.
- Polyester is chemical and solvent resistant, so it will stay legible even in a dirty climate.
- For high-performance labeling, abrasion and scuff resistance are essential.
- Meets NEC & IFC standards for printed text, character height, color, and outdoor UV stability to pass inspections.

Hellermann Part# : 596-00892

Dimensions (LxW): 3.75 x 1"

Certifications & Approvals - ] - ] - ]

Product Attributes

- Dimensions: 1 × 1 × 1 cm
- Weight: .05 kg